




WPD2-600-6000-30

2-Way, 0.6~6GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

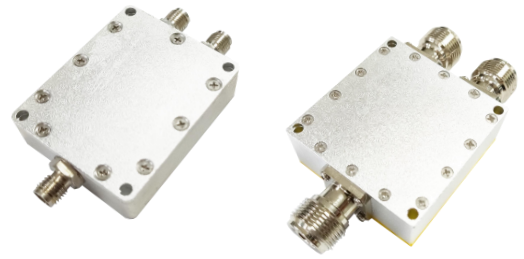

Electrical

Frequency:	0.6~6GHz
Insertion Loss:	0.9dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±1° max.
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical

Size ^{*1} (SMA):	45*36*12mm 1.772*1.417*0.472in
Size ^{*1} (N):	50*48*20mm 1.969*1.89*0.787in
Connectors ^{*2} :	SMA Female N Female TNC Female SMP Male

[1] Exclude connectors.
 [2] Female connectors can be replaced with male connectors on request.

Environmental

Operating Temperature:	-35~+75°C
Non-operating Temperature:	-45~+85°C

How To Order

WPD2-600-6000-30-Y


Y: Connector type

Connector naming rules:
 S - SMA Female (Outline A)
 N - N Female (Outline B)
 T - TNC Female
 P - SMP Male


Examples:

To order a 2-way power divider, 0.6~6GHz, 30W, N female, specify
 WPD2-600-6000-30-N.

Outline Drawings

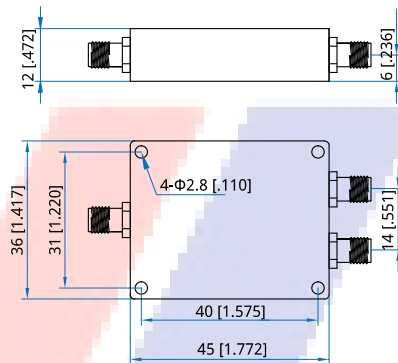

Outline A

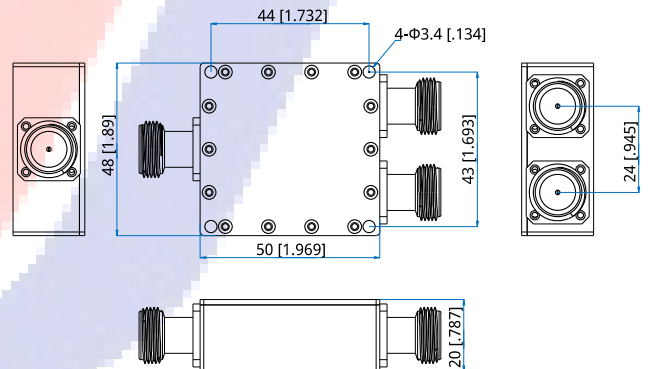

Outline B

Unit: mm [in]
 Tolerance: ±0.5mm [±0.02in]


Customization is available upon request.




Typical Performance Curves

SMA


Input VSWR vs. Frequency

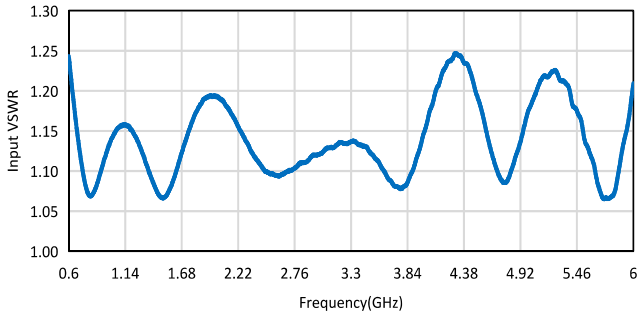


Output VSWR vs. Frequency

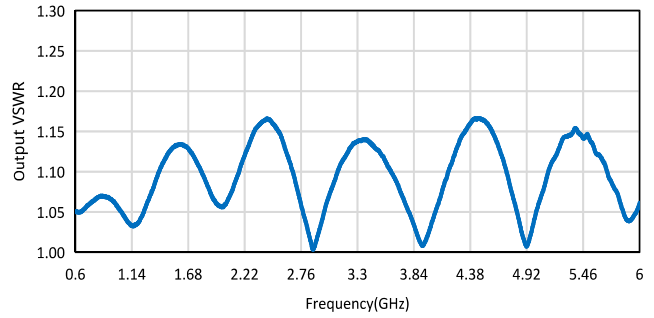


Insertion Loss vs. Frequency

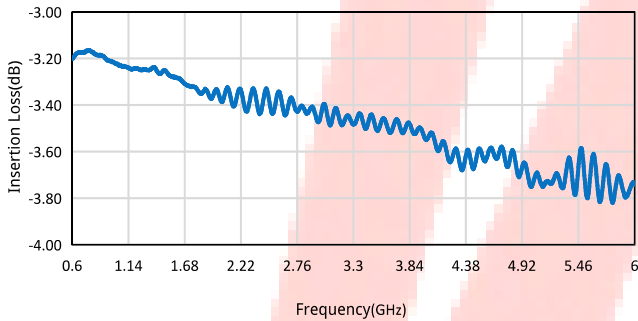


Isolation vs. Frequency

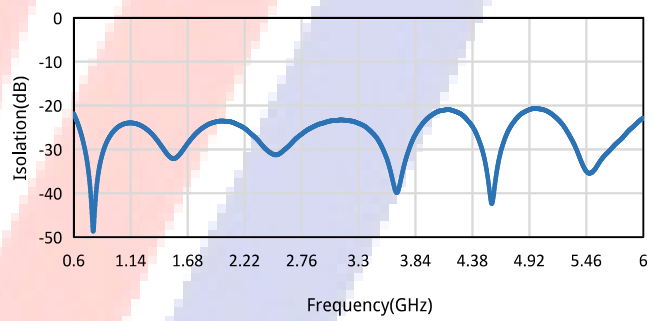

Amplitude Balance vs. Frequency

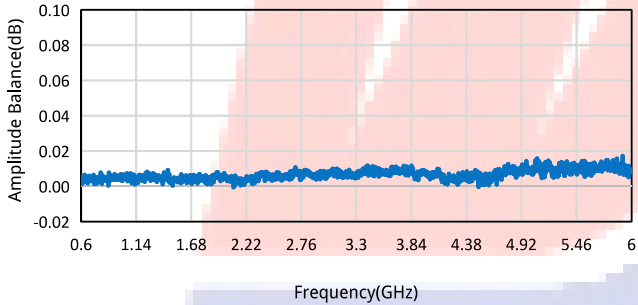


Phase Balance vs. Frequency

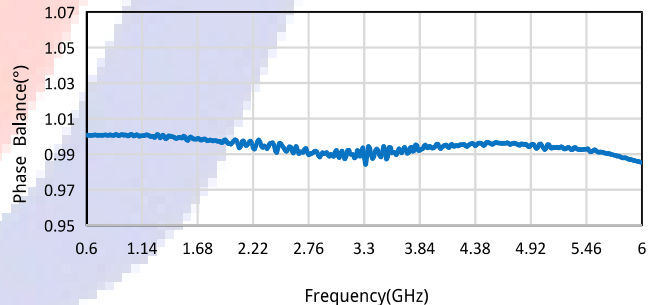


Typical Performance Curves

N

Input VSWR vs. Frequency

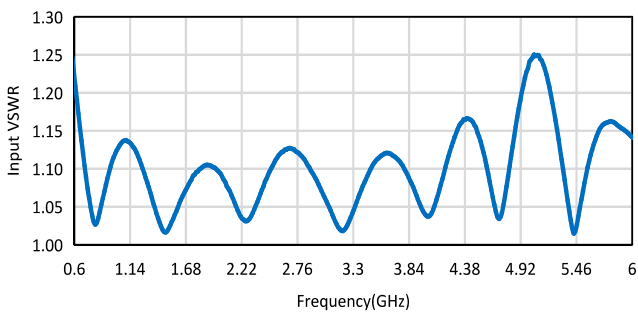


Output VSWR vs. Frequency

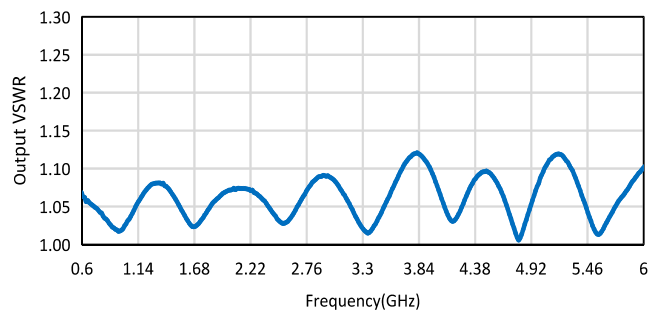




2-Way Power Dividers/Combiners


Insertion Loss vs. Frequency

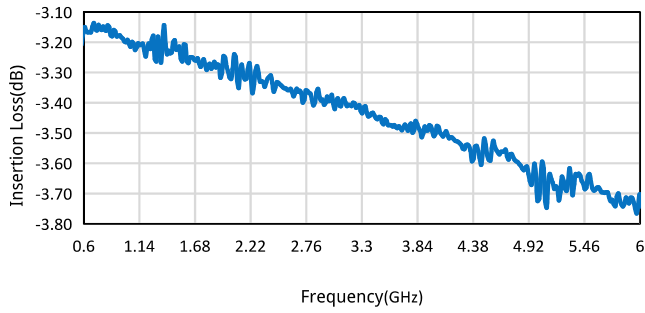

Isolation vs. Frequency

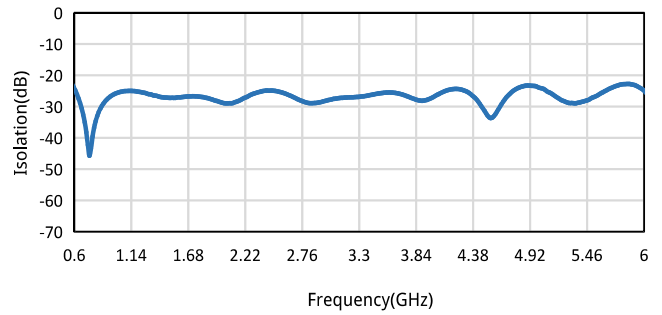

Amplitude Balance vs. Frequency

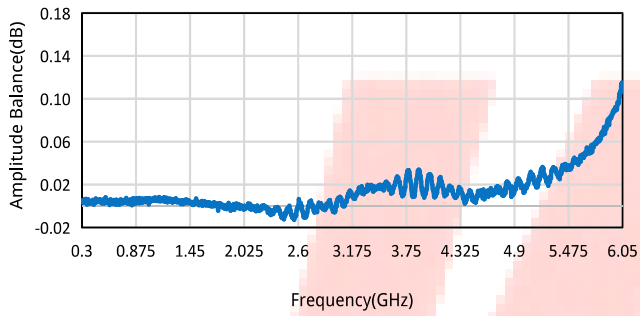

Phase Balance vs. Frequency

