



WANL1

N to L16

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~18GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: N
L16
Mating Life Cycle: 500 cycles
Outer Conductor: Passivated Stainless Steel
Dielectric: PEI
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

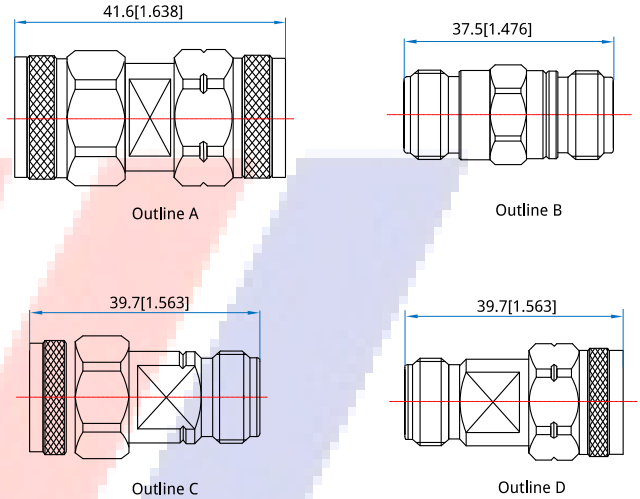

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- WANL1-MM** - N(m) to L16(m), Outline A
- WANL1-FF** - N(f) to L16(f), Outline B
- WANL1-MF** - N(m) to L16(f), Outline C
- WANL1-FM** - N(f) to L16(m), Outline D

Customization is available upon request.