



WABZ

BNC to UHF

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~3GHz
Impedance: 50Ω


Mechanical

RF Connectors: BNC
UHF
Mating Life Cycle: 500 cycles
Outer Conductor: Nickel Plated Brass
Dielectric: PTFE
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -55~+165°C

Outline Drawings

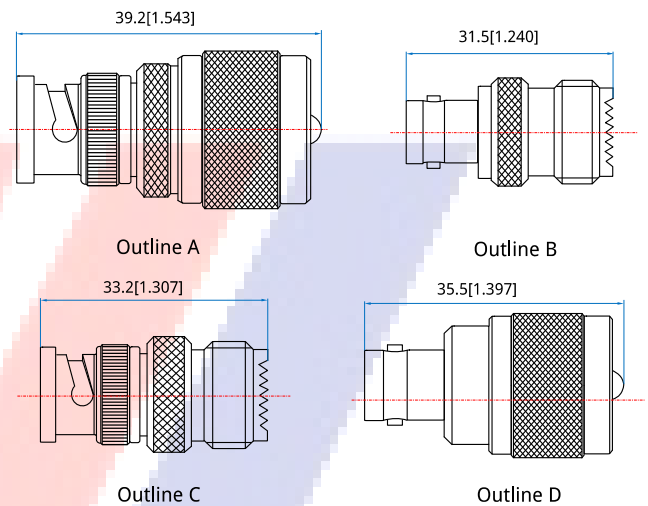

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- WABZ-MM** - BNC(m) to UHF(m), Outline A
- WABZ-FF** - BNC(f) to UHF(f), Outline B
- WABZ-MF** - BNC(m) to UHF(f), Outline C
- WABZ-FM** - BNC(f) to UHF(m), Outline D

Customization is available upon request.