



WFA2620

DC~26.5GHz, 20W

Features:
 * Low VSWR
 * High Attenuation Flatness

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: DC~26.5GHz
 Attenuation: 3dB, 6dB, 10dB, 20dB, 30dB
 Impedance: 50Ω
 Average Power*1: 20W@25°C max.
 Peak Power: 200W (5μS pulse width, 10% duty cycle)

[1] Derated linearly to 2W@125°C.


Environmental

Temperature: -55~+125°C

Mechanical

RF Connectors: SMA
 Housing: Aluminum
 Dielectric: PTFE
 Outer Conductor: Passivated stainless steel
 Male Inner Conductor: Gold plated brass
 Female Inner Conductor: Gold plated beryllium copper

Outline Drawings

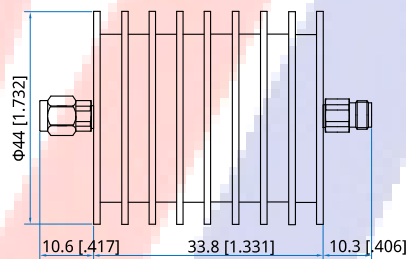

Unit: mm [in]
 Tolerance: ± 2 mm [± 0.08 in]

Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (\pm dB) vs. Attenuation (dB)					VSWR (max.)
	3	6	10	20	30	
DC~26.5	-1.2/+1.2	-1.2/+1.2	-1.5/+1.5	-1.5/+1.5	-1.5/+1.5	1.3

How To Order

WFA2620-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

S - SMA

Examples:

To order an attenuator,

DC~26.5GHz, SMA male to SMA female, 10dB attenuation,

specify WFA2620-26.5-10-S.