



# WPD2-0.2-2-10-S

2-Way, 0.2~2MHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**


Frequency:	0.2~2MHz
Insertion Loss:	0.5dB max.
VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±2°
Power @SUM Port:	10W as divider

**Mechanical**

Size*1:	31.95*31.75*19.05mm 1.258*1.25*0.75in
Connectors:	SMA Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

**Outline Drawings**

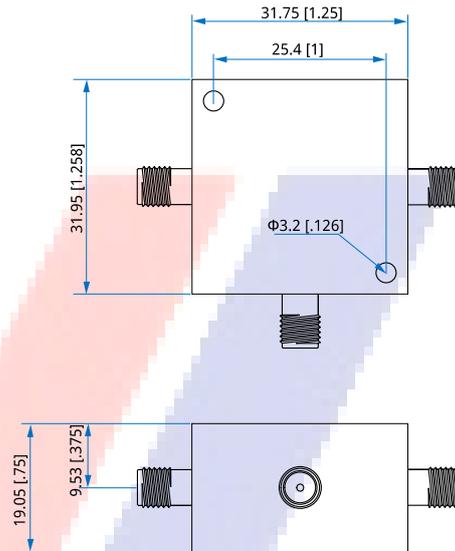

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

**How To Order**  
**WPD2-0.2-2-10-S**

Customization is available upon request.