



## WPD2-1-500-25-S

2-Way, 0.001~0.5GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	0.001~0.5GHz
Insertion Loss:	1dB max.
VSWR:	1.4 max.
Isolation:	15dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	5° max.
Power @SUM Port:	25W as divider 25W as combiner

### Mechanical


Size*1:	32*32*20mm 1.26*1.26*0.787in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

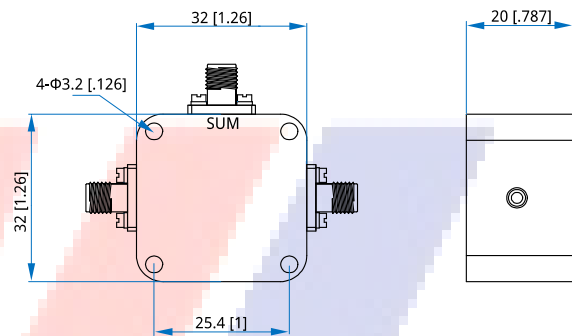

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

### How To Order

**WPD2-1-500-25-S**

Customization is available upon request.