



## WPD2-2-1000-10-S

2-Way, 0.002~1GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical


Frequency:	0.002~1GHz
Insertion Loss:	1.2dB max.
VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	0.2dB
Phase Balance:	5°
Power @SUM Port:	10W as divider

### Mechanical

Size*1:	31.95*31.75*19.05mm 1.258*1.25*0.75in
Connectors:	SMA Female
Mounting:	2- $\Phi$ 3.2mm through-hole

[1] Exclude connectors.

### Outline Drawings

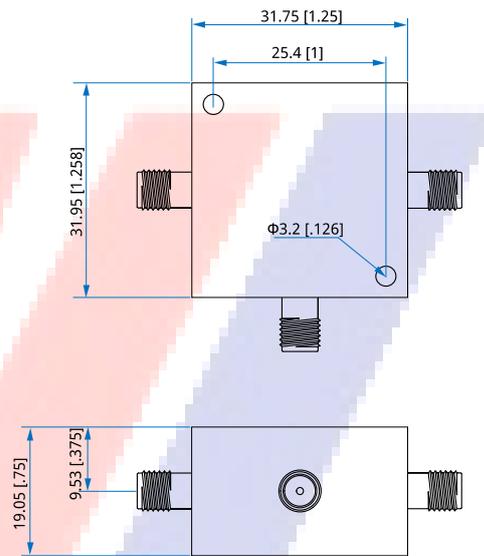

Unit: mm [in]  
Tolerance:  $\pm 0.5$ mm [ $\pm 0.02$ in]

### How To Order

**WPD2-2-1000-10-S**

Customization is available upon request.