



WPD2-5-1000-1-B

2-Way, 0.005~1GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.005~1GHz
Insertion Loss:	1dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.25 max.
Isolation:	17dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	$\pm 3^\circ$
Impedance:	50 Ω
Power @SUM Port:	1W max. as divider 0.5W max. as combiner

Mechanical

Mounting: 4- $\Phi 3.2$ mm through-hole

Environmental


Operation Temperature: $-35\sim+75^\circ\text{C}$

How To Order

WPD2-5-1000-1-B

Customization is available upon request.

Outline Drawings

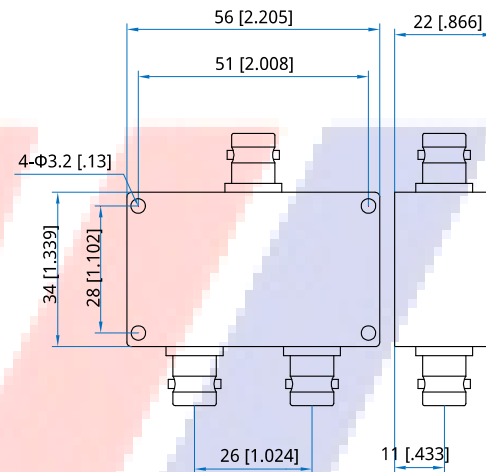

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]