



WPD2-20-1000-K5-N

2-Way, 0.02~1GHz

Features:
* Small Size
* Low Insertion Loss

Applications:
* Amplifiers
* Mixers
* Antennas
* Laboratory Test

Electrical

Frequency:	0.02~1GHz
Insertion Loss:	0.7dB max.
VSWR:	1.35 max.
Isolation:	15dB min.
Amplitude Balance:	0.1dB max.
Phase Balance:	3° max.
Impedance:	50Ω
Power @SUM Port:	500W max. as divider 500W max. as combiner

Mechanical

Size^{*1}: 80*120*34mm
3.15*4.724*1.339in

Connectors: N Female

[1] Exclude connectors.

Environmental


Temperature: -55~+125°C

How To Order

WPD2-20-1000-K5-N

Customization is available upon request.

Outline Drawings

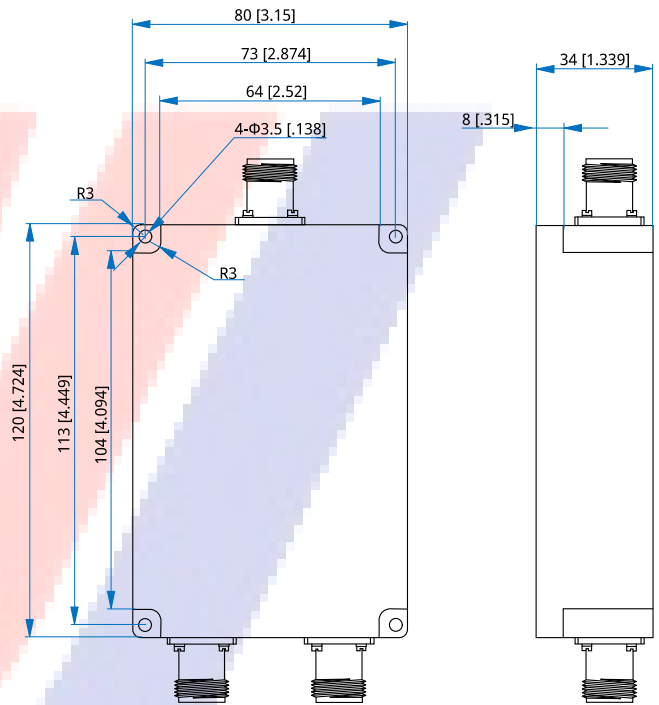

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]