



WPD2-30-512-K3-N

2-Way, 30~512MHz

Features:
* Small Size
* Low Insertion Loss

Applications:
* Amplifiers
* Mixers
* Antennas
* Laboratory Test

Electrical

Frequency:	30~512MHz
Insertion Loss:	1.4dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.20 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±2°
Impedance:	50Ω
Power @SUM Port:	300W max. as divider 100W max. as combiner

Mechanical


Size*1:	295*224*22mm 11.614*8.819*0.866in
Connectors:	N Female
Mounting:	4-Φ4.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

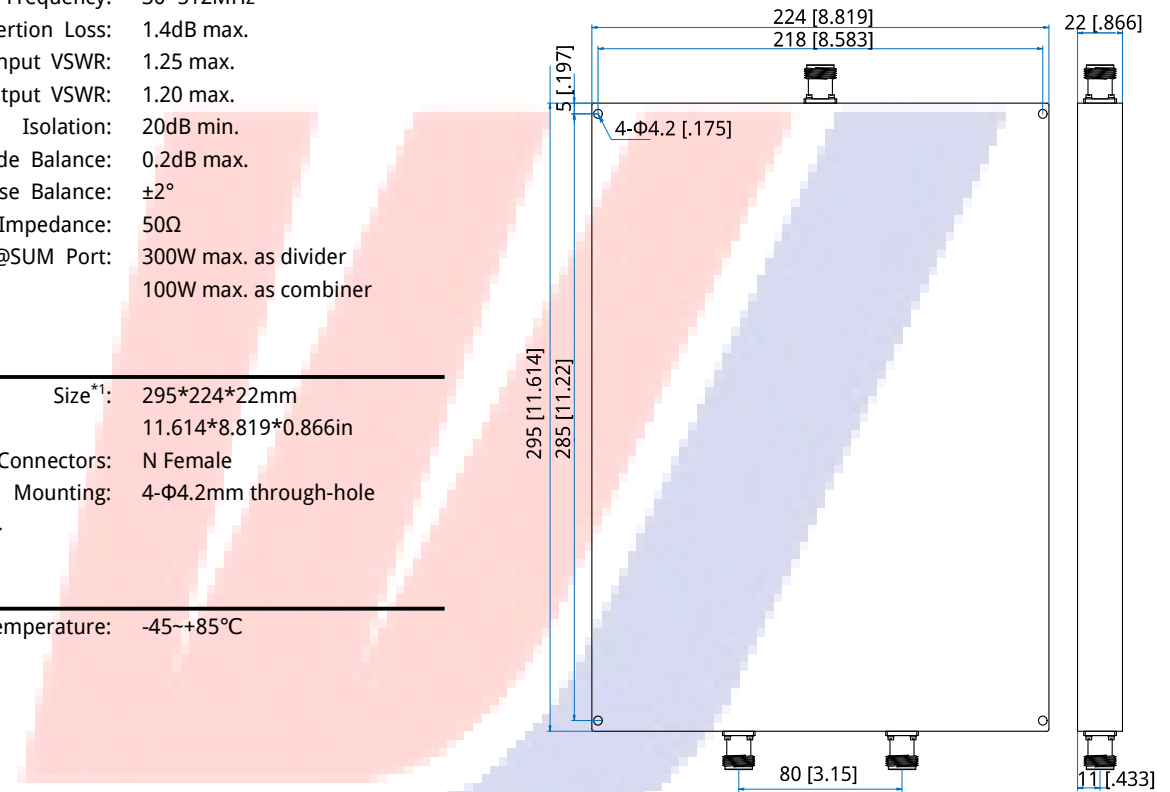

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

WPD2-30-512-K3-N

Customization is available upon request.