



## WPD2-380-460-K1-7

2-Way, 0.38~0.46GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	0.38~0.46GHz
Insertion Loss:	0.3dB max.
Input VSWR:	1.2 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	$\pm 2^\circ$
Impedance:	50 $\Omega$
Power @SUM Port:	100W max. as divider
IP Grade:	IP67

### Mechanical


Size <sup>*1</sup> :	95*78*30mm 3.74*3.071*1.181in
Connectors:	7/16 DIN Female

[1] Exclude connectors.

### Environmental

Operation Temperature:	-35~+70°C
------------------------	-----------

### Outline Drawings

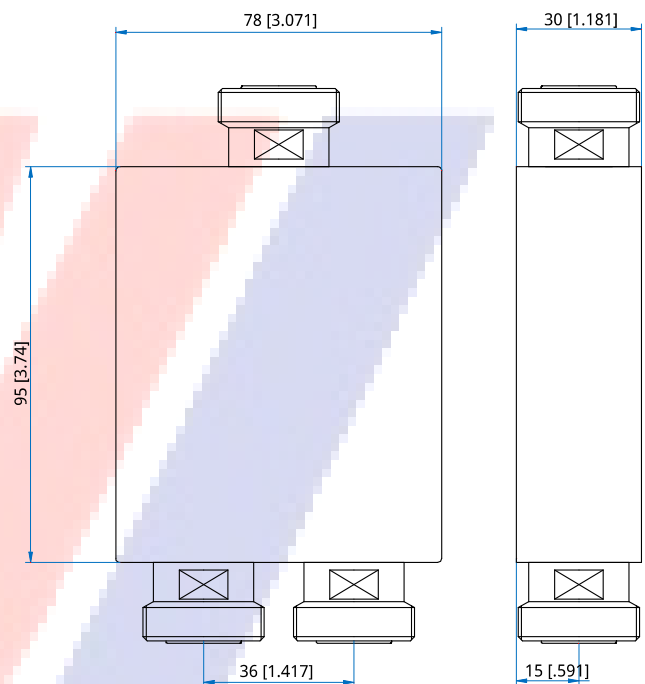

Unit: mm [in]  
Tolerance:  $\pm 0.5$ mm [ $\pm 0.02$ in]

### How To Order

**WPD2-380-460-K1-7**

Customization is available upon request.