



## WPD2-400-7500-20-S

2-Way, 0.4~7.5GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	0.4~7.5GHz
Insertion Loss:	1.5dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

### Mechanical


Size <sup>*1</sup> :	75*28*10mm 2.953*1.102*0.394in
Weight:	100g
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

### Outline Drawings

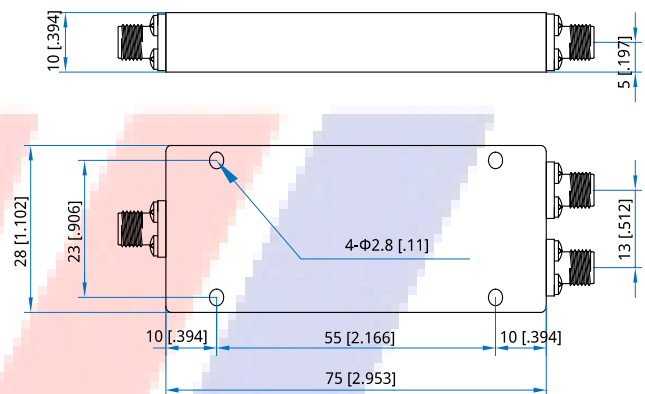

Unit: mm [in]  
Tolerance: ±0.5mm [±0.02in]

### How To Order

**WPD2-400-7500-20-S**

Customization is available upon request.